

#žBđVgUf @S_ W >76 5 S' abk >[YZf




BDA6 G5 F EB75 ;8;5 3 F;A @E			
Model No.:	SW-CP001B-W150-X, X can be S and M, S=SOSEN driver, M=Mean Well driver		
Power:	150W		
Input:	AC100-277V, 50/60Hz, 0.67A(at 230v); 347/480VAC for option		
PF:	> 0.97		
IP Grade:	IP65		
THD:	10% (at 230v, 50Hz)		
Surge protection:	L/N-PE: 10KV, L-N: 6KV; 20KV version is for option.		
F75 : @53 > 5 : 3 D35 F7D;EF;5 E			
Color:	Warm White	Natural White	Cool White
Color Temperature:	2700-3200K	4000-4500K/5000-5500K	5700-6500K
CRI:	>70Ra	>70Ra	>70Ra
Light Efficiency:	130-140lm/w		
View angle:	60° , 90° ;		
5 A @8;9 GD3 F;A @E			
LED chip:	3030 SMD LED(Lumileds)		
Heat sinks:	Aluminum		
Body color:	White		
AF: 7 DE			
Operating Temperature:	-35°C - 50°C		
Operating Humidity:	10% - 90% RH		
Storage Temperature:	-35°C to 60°C		
Net W./Gross W.:	5.5KGS/6.5KGS		
Packing size:	42*41*17CM		
Warranty:	3 years		
Certificates:	CE, RoHS, SAA, ETL		

TADA Petromart

Contact: +63 (0965)0537214 E-mail: jm.limtada@gmail.com


51 General Yenco St. Imus Cavite philippines 4104

2. Product size:

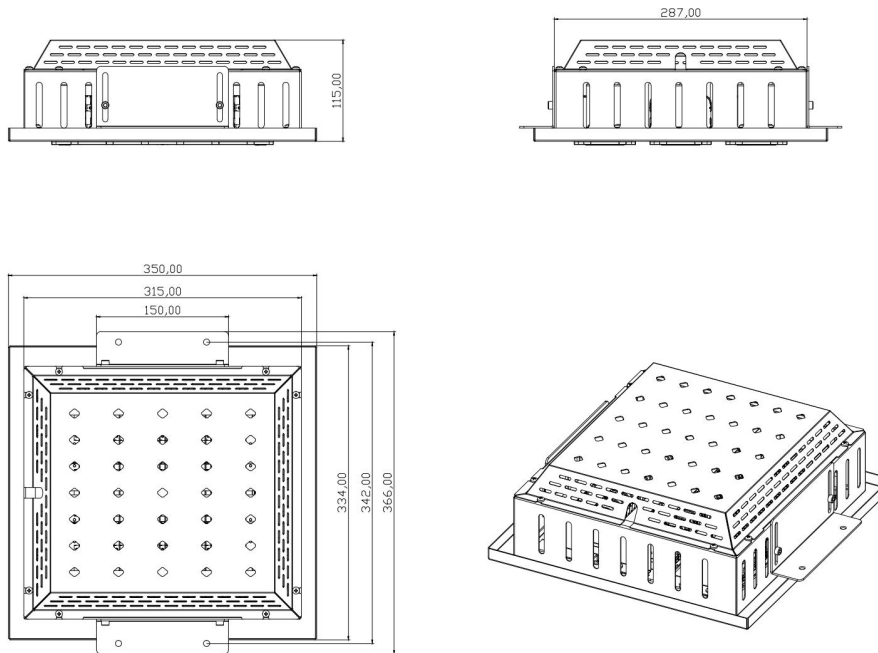

3. Applications:

Widely used in shopping mall, gas station, exhibition hall, gymnasium, warehouse, workshop, cold storage, etc.

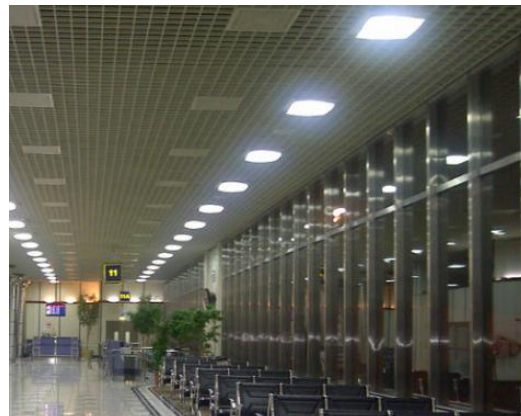

4. Wire connection:

Brown/Black: Live Wire(L)

Blue/White: Neutral Wire(N)


Yellow/Green: Ground Wire(G)

L  Brown

N  Blue

  Yellow

L  Black

N  White

  Green

(for North America only)



The Ground Wire must be connected correctly!

Warning:

- Before installation or wiring the lamps, please make sure the power is switched off;
- Before cleaning or repairing the lamp, please make sure the power is switched off;
- The lamp body will be very hot while working, do not touch it with your hand.